


无固定装置热电偶 Non-fixed assembly thermocouple

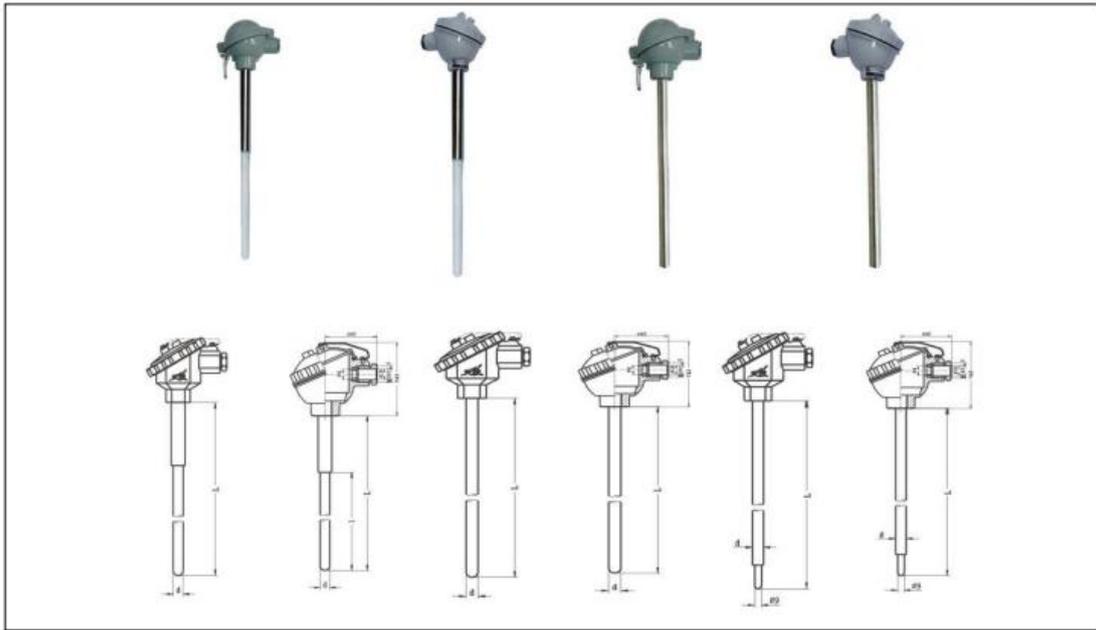

型号 Model	分度号 Graduation	测温范围 °C Range of temperature measurement °C	热响应时间 Thermal response time	保护管材质 Material for protective tube	规格 Specification	
					d	L
WRM-122 WRN ₂ -122	N	0~1200	<240s	高铝质 High-aluminum	Φ16	300×150 350×200 400×250 450×300 500×350 550×400 650×500 900×750 1150×1000 1650×1500 2150×2000
WRN-122 WRN ₂ -122	K					
WRM-123 WRM ₂ -123	N					
WRN123 WRN ₂ -123	K					
WRM-132 WRM ₂ -132	N					
WRN-132 WRN ₂ -132	K					
WRM-133 WRM ₂ -133	N					
WRN-133 WRN ₂ -133	K					

1)型号122、123为防喷式，防护等级IP65；型号132、133为防水式，防护等级IP55；

2)保护管其余材质根据协议订货。

1) Model 122 and 123 are anti-spraying type with the protective grade being IP65; Model 122 and 123 are waterproof type with the waterproof grade being IP55;

2) The material for the rest protective tube is ordered according to the agreement.

型号 Model	分度号 Graduation	测温范围 °C Range of temperature measurement °C	热响应时间 Thermal response time	保护管材质 Material for protective tube	规格 Specification		
					d	L	
WRM-130 WRM ₂ -130	N	0~800	<90s	1Cr18Ni9Ti	Φ16		
		0~1100		0Cr25Ni20			
WRM-130G WRM ₂ -130G		0~800	<24s	1Cr18Ni9Ti			
		0~1100		0Cr25Ni20			
WRN-130 WRN ₂ -130	K	0~800	<90s	1Cr18Ni9Ti			
		0~1100		0Cr25Ni20			
WRN-130G WRN ₂ -130G		0~800	<24s	1Cr18Ni9Ti			
		0~1100		0Cr25Ni20			
WRE-130 WRE ₂ -130	E	0~800	<90s	1Cr18Ni9Ti			150 200 250 300 350 400 500 750 1000 1500 2000 2150
WRE-130G WRE ₂ -130G			<24s				
WRC-130 WRC ₂ -130	T	0~350	<90s	1Cr18Ni9Ti			
WRC-130G WRC ₂ -130G			<24s				
WRF-130 WRF ₂ -130	J	0~600	<90s	1Cr18Ni9Ti			
WRF-130G WRF ₂ -130G			<24s				
WRM-131 WRM ₂ -131	N	0~800	<90s	0Cr25Ni20			
		0~1100		1Cr18Ni9Ti			
WRM-131G WRM ₂ -131G		0~800	<24s	0Cr25Ni20			
		0~1100		1Cr18Ni9Ti			
WRN-131 WRN ₂ -131	K	0~800	<120s	0Cr25Ni20			
		0~1100		1Cr18Ni9Ti			
WRN-131G WRN ₂ -131G		0~800	<24s	0Cr25Ni20			
		0~1100		0Cr25Ni20			
WRE-131G WRE ₂ -131G	E	0~800	<120s	1Cr18Ni9Ti			
WRE-131 WRE ₂ -131			<24s				
WRC-131 WRC ₂ -131	T	0~350	<120s	1Cr18Ni9Ti			
WRC-131G WRC ₂ -131G			<24s				
WRF-131 WRF ₂ -131	J	0~600	<120s	1Cr18Ni9Ti			
WRF-131G WRF ₂ -131G			<24s				

- 1) 型号130、131为防水式，防护等级IP55；
2) 型号120、121为防喷式，防护等级IP65，其它参数同130、131；
3) 保护管其余材质根据协议订货。

- 1) Model 130 and 131 are water proof type with the protective grade being IP55.
2) Model 120 and 121 are anti-spaying type with the waterproof grade being IP65; the other parameters are the same as model 130 and 131.
3) The material for the rest protective tube is ordered according to the agreement.