


直形管接头式热电偶 Joint type thermocouple of straight pipe

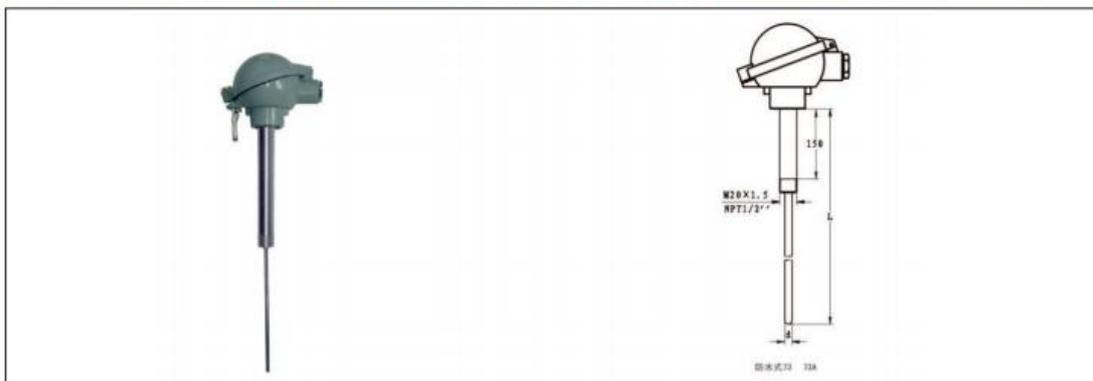

型号 Model	分度号 Graduation	测温范围 °C Range of temperature measurement °C	连接尺寸 Connection size	保护管材质 Material for protective tube	规格 Specification	
					d	L
WRM-73 WRM ₂ -73	N	0~1100	M20×1.5	0Cr25Ni20	Φ3 Φ4 Φ5 Φ6 Φ8	245 270 295 345 395 445 545 645 745 899 1149
WRM-73A WRM ₂ -73A			NPT1/2			
WRN-73 WRN ₂ -73	K		M20×1.5	1Cr18Ni9Ti		
WRN-73A WRN ₂ -73A			NPT1/2			
WRE-73 WRE ₂ -73	E	0~700	M20×1.5	1Cr18Ni9Ti		
WRE-73A WRE ₂ -53A			NPT1/2			
WRC-73 WRC ₂ -73	T	0~350	M20×1.5	1Cr18Ni9Ti		
WRC-73A WRC ₂ -73A			NPT1/2			
WRF-73 WRF ₂ -73	J	0~600	M20×1.5	1Cr18Ni9Ti		
WRF-73A WRF ₂ -73A			NPT1/2			

- 1) 型号73、73A为防水式，防护等级IP55；
- 2) 型号72、72A为防喷式，防护等级IP65，其它参数同73、73A；
- 3) 如无特殊之约定，L 仅为参考尺寸，热电偶插入深度应为热安装套管U尺寸；
- 4) 热安装套管形式详见P119。

- 1) Model 73 and 73A are waterproof type with the protective grade being IP55.
- 2) Model 72 and 72A are anti-spring type with the protective grade being IP65.
- 3) If there is no special agreement, L is only the reference size. The insertion depth of the thermocouple should be the size of thermal installation sleeve U.
- 4) The form of thermal mounting sleeve is shown in P119.