


固定螺紋式热电偶 Thermocouple of fixed screw type

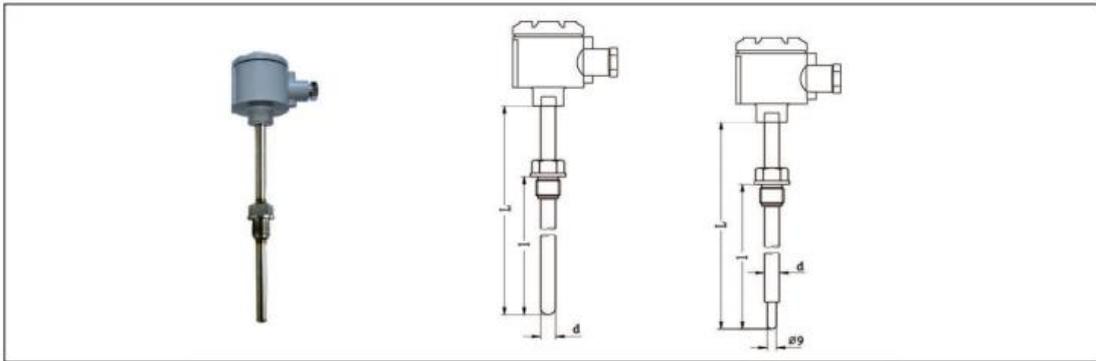

型号 Model	分度号 Graduation	测温范围 °C Range of temperature measurement °C	热响应时间 Thermal response time	保护管材质 Material for protective tube	规格 Specification		
					d	L	
WRM-240 WRM ₂ -240	N	0~800	<90s	1Cr18Ni9Ti	Φ 16	300×150 350×200 400×250 450×300 500×350 550×400 650×500 900×750 1150×1000 1650×1500 2150×2000	
WRM-240G WRM ₂ -240G		0~1100		0Cr25Ni20			
WRN-240 WRN ₂ -240	K	0~800	<24s	1Cr18Ni9Ti			
WRN-240G WRN ₂ -240G		0~1100		0Cr25Ni20			
WRN-240 WRN ₂ -240		0~1000		1Cr18Ni9Ti			
WRN-240G WRN ₂ -240G	E	0~800	<90s	0Cr25Ni20			
WRE-240 WRE ₂ -240		0~800		<24s			1Cr18Ni9Ti
WRE-240G WRE ₂ -240G							0Cr25Ni20
WRC-240 WRC ₂ -240	T	0~350	<90s	1Cr18Ni9Ti			
WRC-240G WRC ₂ -240G							<24s
WRF-240 WRF ₂ -240	J	0~600	<90s	1Cr18Ni9Ti			
WRF-240G WRF ₂ -240G							<24s

- 1) 热电偶 I 级按协议订货;
- 2) 保护管其余材质根据协议订货;
- 3) 公称压力 ≤4MPa。

- 1) Thermocouple I is ordered according to the agreement.
- 2) The material for the rest protective tube is ordered according to the agreement.
- 3) Nominal pressure is: ≤4MPa.

型号示例 Examples of models	螺纹规格 Thread specification	
	代号 Code	M
WRN-240		M27×2
WRN-240A	A	G 3/4
WRN-240G		M27×2
WRN-241A	A	G 3/4