


直形管接头式 Joint type of straight pipe

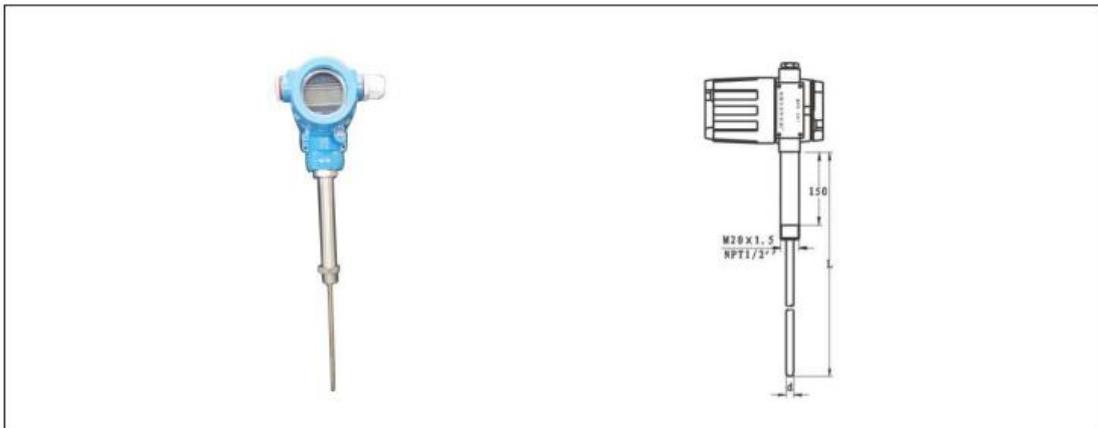

型号 Model	分度号 Graduation	测温范围 °C Range of temperature measurement °C	连接尺寸 Thermal response time	防爆等级 Explosion-proof	规格 Specification	
					d	L
WRMB-74M WRMB-74S	N	0~1300	M20×1.5	dIIBT4 dIICT5 dIICT6 iaIICT6	Φ4 Φ5 Φ6 Φ8	250 275 300 350 400 450 550 650 750
WRMB-74AM WRMB-74AS			NPT1/2			
WRNB-74M WRNB-74S	K	0~1300	M20×1.5			
WRNB-74AM WRNB-74AS			NPT1/2			
WREB-74M WREB-74S	E	0~800	M20×1.5			
WREB-74AM WREB-74AS			NPT1/2			
WRCB-74M WRCB-74S	T	0~350	M20×1.5			
WRCB-74AM WRCB-74AS			NPT1/2			
WRFB-74M WRFB-74S	J	0~600	M20×1.5			
WRFB-74AM WRFB-74AS			NPT1/2			
WZPB-74M WZPB-74S	Pt100	A级 -30-300 B级 -50-500	M20×1.5			
WZPB-74AM WZPB-74AS			NPT1/2			
WZCB-74M WZCB-74S	Cu50 Cu100	-50~100	M20×1.5			
WZCB-74AM WZCB-74AS			NPT1/2			