


## 耐磨热电偶（阻） Wear-resistant thermocouple

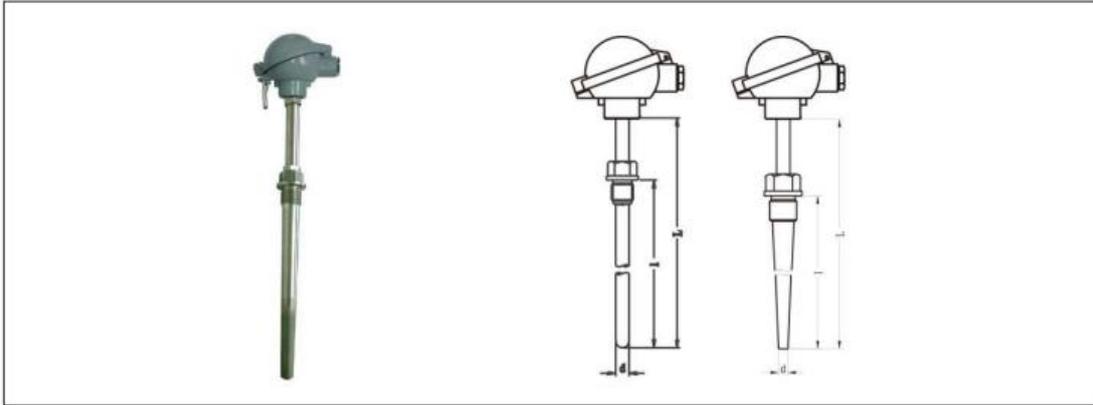

### 应用

适合于电厂球磨机及磨煤机等对保护管磨损严重的场合

### Application

It is suitable for ball mill and coal mill and other occasions where the protection pipe is seriously wore in power plant.

### 主要技术参数

电气出口：M20×1.5, NPT1/2  
耐磨头硬度：HRC62~65  
防护等级：IP65

### Main technical parameters

Electrical outlet：M20×1.5, NPT1/2  
Hardness of wear-resistance head：HRC62~65  
Protection level：IP65

### 型号及规格 Model and specifications

型号 Model	分度号 Graduation	测温范围 °C Range of temperature measurement °C	公称压力 Nominal pressure	流速 Flow rate	规格 Specification	
					d	L×1
WRN-230NM WRN <sub>2</sub> -230NM	K	0~1000	≤10MPa	≤100m/s	Φ6	300×150 350×200 400×250 450×300 500×350 550×400 650×500 900×750 1150×1000
WRE-230NM WRE <sub>2</sub> -230NM	E	0~800				
WZP-230NM WZP <sub>2</sub> -230NM	Pt100	A级 -30-300 B级 -50-500				
WRN-630NM WRN <sub>2</sub> -630NM	K	0~1000	≤30MPa	≤80m/s	Φ15	
WRE-630NM WRE <sub>2</sub> -630NM	E	0~800				
WZP-630NM WZP <sub>2</sub> -630NM	Pt100	A级 -30-300 B级 -50-500				