


防水式铠装热电偶 Sheath thermocouple of waterproof type

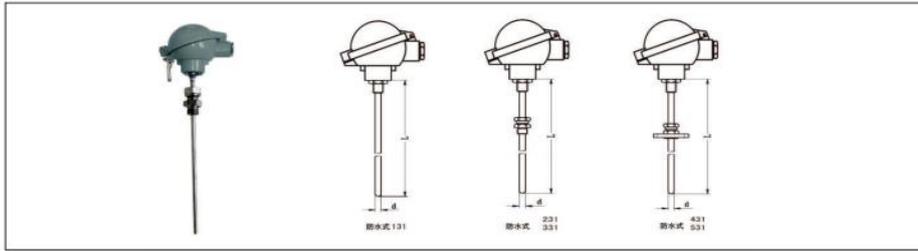

型号 Model	分度号 Graduation	测温范围℃ Range of temperature measurement measurement °C	保护管材质 Material for protective tube	安装固定装置 Installation and fixation device
WRPK-131	S	0~1300	GH3039	无固定装置 No fixation device
WRMK-131	N	0~1100	GH3030	
WRNK-131	K	0~800	Cr18Ni9Ti	
		0~1100	GH3030	
WREK-131	E	0~800	1Cr18Ni9Ti	
WRCK-131	T	0~350		
WRFK-131	J	0~600		

型号 Model	分度号 Graduation	测温范围℃ Range of temperature measurement measurement °C	保护管材质 Material for protective tube	安装固定装置 Installation and fixation device
WRPK-231	S	0~1300	GH3039	固定卡套螺纹 Fixed-sleeve screw thread
WRMK-231	N	0~1100	GH3030	
		0~800	1Cr18Ni9Ti	
WRNK-231	K	0~1100	GH3030	
		0~800	1Cr18Ni9Ti	
WREK-231	E	0~800	1Cr18Ni9Ti	
WRCK-231	T	0~350		
WRFK-231	J	0~600		
WRPK-331	S	0~1300	GH3039	可动卡套螺纹 Movable-sleeve screw thread
WRMK-331	N	0~1100	GH3030	
		0~800	1Cr18Ni9Ti	
WRNK-331	K	0~1100	GH3030	
		0~800	1Cr18Ni9Ti	
WREK-331	E	0~800	1Cr18Ni9Ti	
WRCK-331	T	0~350		
WRFK-331	J	0~600		
WRPK-431	S	0~1300	GH3039	固定卡套法兰 Fixed-sleeve screw flange
WRMK-431	N	0~1100	GH3030	
		0~800	1Cr18Ni9Ti	
WRNK-431	K	0~1100	GH3030	
		0~800	1Cr18Ni9Ti	
WREK-431	E	0~800	1Cr18Ni9Ti	
WRCK-431	T	0~350		
WRFK-431	J	0~600		
WRPK-531	S	0~1300	GH3039	可动卡套法兰 Movable-sleeve screw flange
WRMK-531	N	0~1100	GH3030	
		0~800	1Cr18Ni9Ti	
WRNK-531	K	0~1100	GH3030	
		0~800	1Cr18Ni9Ti	
WREK-531	E	0~600	1Cr18Ni9Ti	
WRCK-531	T	0~350		
WRFK-531	J	0~600		

1) 型号121、221、321防护等级IP65，其他参数同131、231、331；
2) 热电偶级按协议订货；
3) 未注明测温范围及保护管材质，保护管材质一律视为1Cr18Ni9Ti。

1) The protective grade of model 121、221、321 is IP65 and other parameter is the same as 131、231、331.
2) Thermocouple is ordered according to the agreement.
3) The material of protective tube is 1Cr18Ni9Ti is the temperature scope and material are noted.

接线方式

Wire-connecting mode

