


扁接插式铠装热电偶 Sheath thermocouple of flat socket type

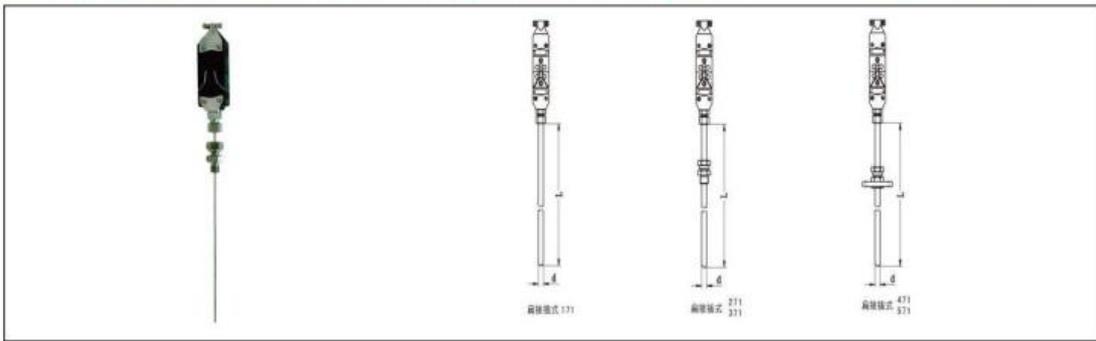

| 名称 Name | 型号 Model | 分度号 Graduation | 测温范围℃ Range of temperature measurement℃ | 安装固定装置 Installation and fixation device |
|--------------------------------------|-------------|-------------------|-----------------------------------------------|-----------------------------------------------|
| 铂铑10-铂 Platinum10-rhodium | WRPK-171 | S | 0~1300 | 无固定装置 No fixation device |
| 镍铬硅-镍硅 Nichrome-nickel silicon | WRMK-171 | N | 0~1100 | |
| 镍铬-镍硅 Nickel chromium nickel silicon | WRNK-171 | K | 0~800 | |
| 镍铬-铜镍 Nickel chromium-nickel copper | WREK-171 | E | 0~350 | |
| 铜-铜镍 Copper-copper Nickel | WRCK-171 | T | 0~600 | |
| 铁-铜镍 Iron-copper nickel | WRFK-171 | J | 0~1300 | |
| 铂铑10-铂 Platinum10-rhodium | WRPK-271 | S | 0~1300 | 固定卡套螺纹 Fixed-sleeve screw thread |
| 镍铬硅-镍硅 Nichrome-nickel silicon | WRMK-271 | N | 0~1100 | |
| 镍铬-镍硅 Nickel chromium nickel silicon | WRNK-271 | K | 0~800 | |
| 镍铬-铜镍 Nickel chromium-nickel copper | WREK-271 | E | 0~350 | |
| 铜-铜镍 Copper-copper Nickel | WRCK-271 | T | 0~600 | |
| 铁-铜镍 Iron-copper nickel | WRFK-271 | J | 0~1300 | |
| 铂铑10-铂 Platinum10-rhodium | WRPK-371 | S | 0~1300 | 可动卡套螺纹 Movable-sleeve screw thread |
| 镍铬硅-镍硅 Nichrome-nickel silicon | WRMK-371 | N | 0~1100 | |
| 镍铬-镍硅 Nickel chromium nickel silicon | WRNK-371 | K | 0~800 | |
| 镍铬-铜镍 Nickel chromium-nickel copper | WREK-371 | E | 0~350 | |
| 铜-铜镍 Copper-copper Nickel | WRCK-371 | T | 0~600 | |
| 铁-铜镍 Iron-copper nickel | WRFK-371 | J | 0~1300 | |
| 铂铑10-铂 Platinum10-rhodium | WRPK-471 | S | 0~1300 | 固定卡套法兰 Fixed-sleeve screw flange |
| 镍铬硅-镍硅 Nichrome-nickel silicon | WRMK-471 | N | 0~1100 | |
| 镍铬-镍硅 Nickel chromium nickel silicon | WRNK-471 | K | 0~800 | |
| 镍铬-铜镍 Nickel chromium-nickel copper | WREK-471 | E | 0~350 | |
| 铜-铜镍 Copper-copper Nickel | WRCK-471 | T | 0~600 | |
| 铁-铜镍 Iron-copper nickel | WRFK-471 | J | 0~1300 | |
| 铂铑10-铂 Platinum10-rhodium | WRPK-571 | S | 0~1300 | 可动卡套法兰 Movable-sleeve screw flange |
| 镍铬硅-镍硅 Nichrome-nickel silicon | WRMK-571 | N | 0~1100 | |
| 镍铬-镍硅 Nickel chromium nickel silicon | WRNK-571 | K | 0~800 | |
| 镍铬-铜镍 Nickel chromium-nickel copper | WREK-571 | E | 0~350 | |
| 铜-铜镍 Copper-copper Nickel | WRCK-571 | T | 0~600 | |
| 铁-铜镍 Iron-copper nickel | WRFK-571 | J | | |

1) 热电偶I级按协议订货;
2) 未注明测温范围及保护管材质, 保护管材质一律视为1Cr18Ni9Ti;

1) Thermocouple I is ordered according to the agreement
2) The material of protective tube is 1Cr18Ni9Ti is the temperature scope and material are noted;